

Construction description

- Louvre windows for installation in vertical facades
- Frame and sash profiles made from a thermally separated composite of aluminum and PA6.6 profiles
- Filling made of double or triple insulating glazing or panels
- Glazing completely covers the sash profile from the outside (by means of black edge screen printing RAL 9005), thus achieving an all-glass look
- Louvre windows consist of one or more louvres lying one on top of the other, which open as pivoting sashes via a horizontal axis of rotation. The part of the wing below the axis of rotation opens outwards and the part above it opens inwards. As a rule, the axis of rotation is in the middle of the slat height; can also be postponed up to 1/3 - 2/3 after technical clarification
- Standard with 78° opening angle, if required also from 0° - 90°

Profile dimensions

- frame depth: 50 mm
- frame view width: 38 mm
- Elevation width of vertical wings: 33 mm
- Elevation width horizontal sash joint: 66 mm

Seals

- laterally with brush seal
- horizontal profile joints with brush and EPDM seal

fittings

- Fittings are concealed
- made of corrosion-free materials or galvanized

Possible operations

Manually

- hand lever
- articulated crank rod

motoric

- 230 V - AC
- 24 V - DC

Pneumatic

- pneumatic cylinder PUDV (Approved for NSHEV)

NSHEV
CERTIFIED
EN 12 101-2



Surfaces

- Profiles anodised, powder or wet paint coated in RAL, NCS, DB or special colour


Areas of application

- for ventilation
- as NSHEV DIN EN 12101-2
- for installation in vertical facades (further applications after technical clarification)

Possible sizes


- minimum frame width: 300 mm
- maximum frame width: 2000 mm (wider elements only with division by middle post)
- Slat height variable: 120 mm to 400 mm

Horizontal section single row
(shown without control element)

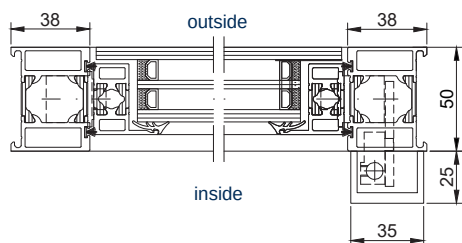


EuroLam louvre windows single row

Horizontal section in two rows
(shown without control element)

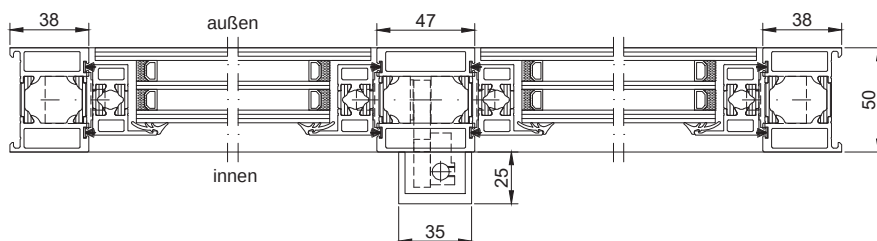

EuroLam louvre window double row

vertical section
(shown without control element)

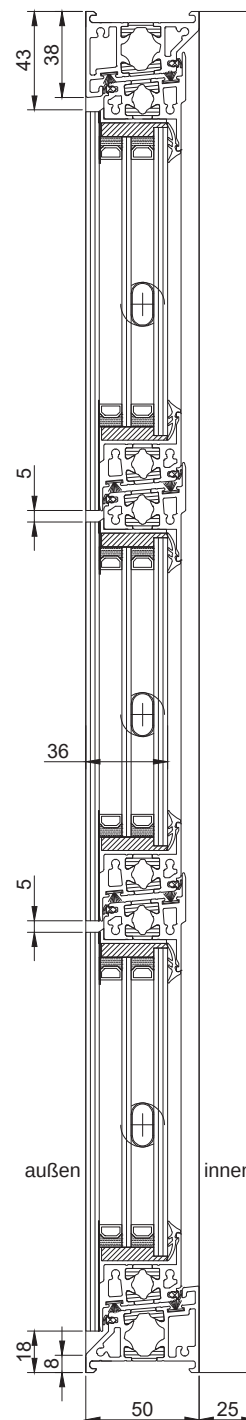

Certifications

Certified DIN EN 14351-1:2006 + A1:2010

- joint passage class 3 (DIN EN 12207)
- Driving rain tightness class 4A (DIN EN 12208)
- wind resistance class C2 (DIN EN 12210)
- permanent function class 3 (DIN EN 1191)

Certified DIN EN 12101-2:2003

- Aerodynamics (attachment B)
- functional safety RE 1000 (attachment C)
- function under load SL 0 (attachment D)
- function at low temperatures T(-20) (attachment E)
- Stability under wind load WL 2500 (attachment F)
- heat resistance B 300 E (attachment G)

More exams

- ball safety (DIN EN 18032-3:1997)
- airborne sound insulation 38 dB (DIN EN ISO 717-1)
- fall protection (DIN EN 18008-4:2013)