


1		2				3			4			
Project:												
Country-City		Investor		Architect		Contractor		offer submission date		Project Completion date		
A	pos.	pieces	RAM hori.(mm)	RAM vert.(mm)	over all flange hori.(mm)	over all flange verti.(mm)	blade (pieces)	operation possibilities	operation side A / B	cable inlet above / below	NSHEV to EN 12101-2 yes / no	anti-trap protection at electric motor yes / no
B	operation possibilities: electric motor = em (24V / 230V); hand lever = hl; crank handle = ch (fixed / removeable); pneumatic = p											
	paint colour:											

vertical section

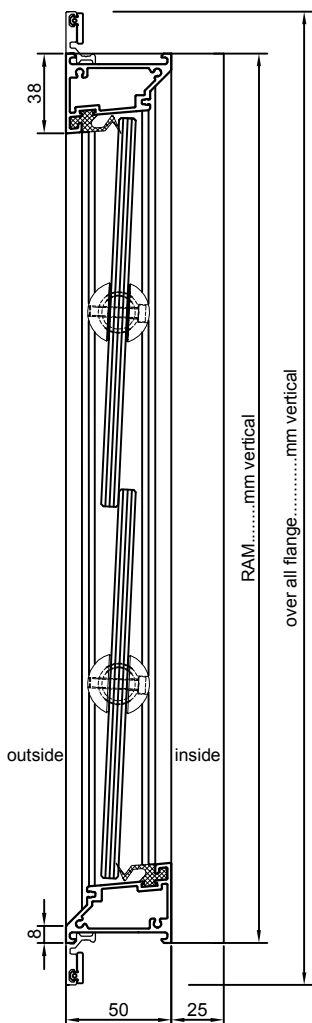

paint colour:

powder manufacturer: product-no.:

glass thickness:



adapter frame optional

adapter strength: (mm)

position (mm)


frame made of non-insulated, extruded aluminium profiles


adapter profile (5-18mm)

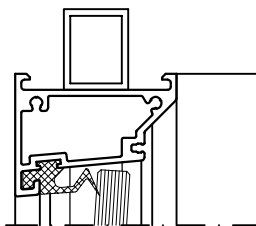

for further adapter variants see data sheet "adapter profiles"

horizontal section

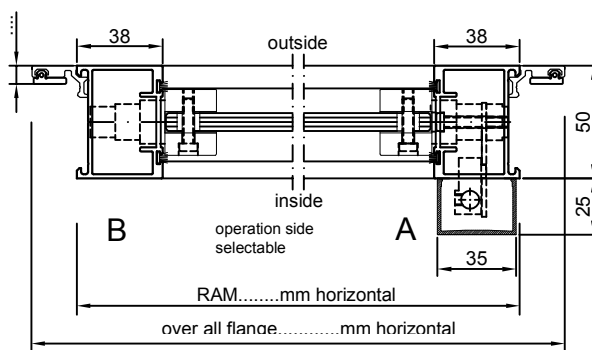

99510 Wiegendorf Germany Tel.: 036462/3388-0 Fax: 036462/3388-13 info@eurolam.de www.eurolam.de						surface treatment:		scale:		position:		unit:	
				date		name		EuroLam-louvre window GG Overlapping BT50					
				drawn									
				checked									
				standard									
								inquiry-/order-data sheet					
list				change		date		name		file:		page	
												p.	