

1		2			3			4				
Project:												
Country-City		Investor		Architect		Contractor		offer submission date		Project Completion date		
A	pos.	pieces	RAM hori.(mm)	RAM vert.(mm)	over all flange hori.(mm)	over all flange verti.(mm)	blade (pieces)	operation possibilities	operation side A / B	cable inlet above / below	NSHEV to EN 12101-2 yes / no	anti-trap protection at electric motor yes / no


operation possibilities: electric motor = em (24V / 230V); hand lever = hl; crank handle = ch (fixed / removeable); pneumatic = p
 paint colour:

powder manufacturer: product-no.:


total panel thickness 48 mm

adapter frame optional
 adapter strength: (mm) position (mm)


adapter profile (5-18mm) adapter profile (standard) 24-60mm adapter profile PVC - black

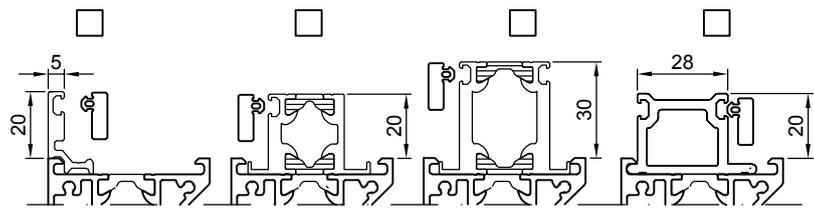

for further adapter variants see data sheet "adapter profiles"

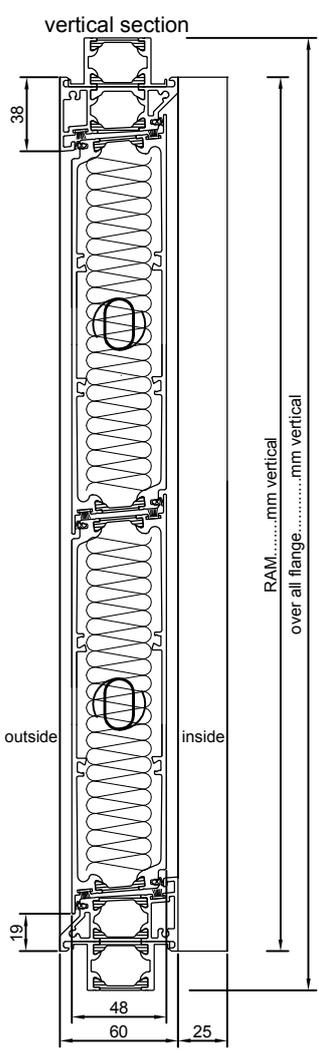

horizontal section

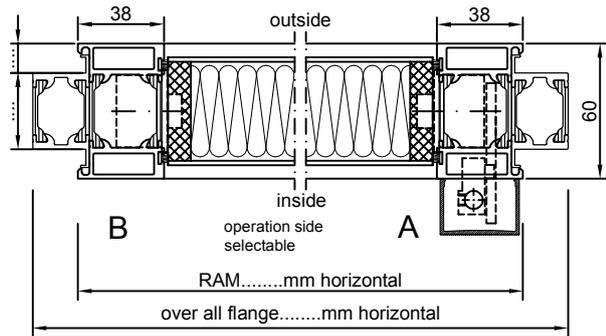

99510 Wiegendorf Germany Tel.: 036462/3388-0 Fax: 036462/3388-13 info@eurolam.de www.eurolam.de				surface treatment:		scale:		position:		unit:	
						EuroLam-louvre window					
						TGL ISO SLP BT 60					
						inquiry-/order-data sheet					
						page					
						p.					
list	change	date	name	file:	2016-12 - inquiry data sheet SLP60.dwg						