1	2	3	4

Project:

Country-City	Investor	Architect	Contractor	offer submission date	Project Completion date

pos.	pieces	RAM hori.(mm)	RAM vert.(mm)	over all flange hori.(mm)	over all flange verti.(mm)	blade (pieces)	operation possibilities	operation side A / B	cable inlet above / below	NSHEV to EN 12101-2 yes / no	anti-trap protection at electric motor yes / no

operation possibilities: electric motor = em (24V / 230V); hand lever = hl; crank handle = ch (fixed / removeable); pneumatic = p

paint colour: .....

powder manufacturer: ..... product-no.: .....

glazing / insulating glass: .....

outside ..... mm / ..... mm gap / inside ..... mm (total thickness of glass 24 mm)

adapter frame optional

adapter strength: ..... (mm) position ..... (mm)

vertical section

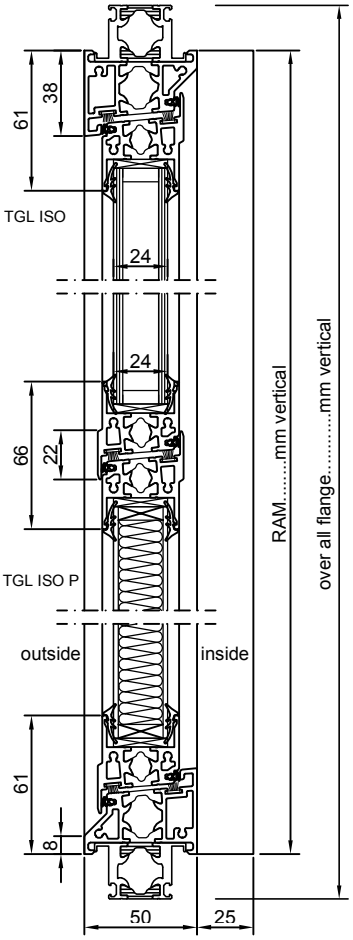

adapter profile (5-18mm) | adapter profile (standard) 24-50mm | adapter profile PVC - black

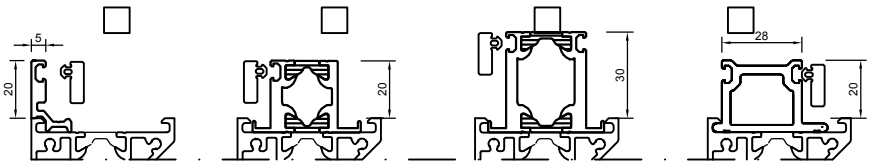

for further adapter variants see data sheet "adapter profiles"

horizontal section

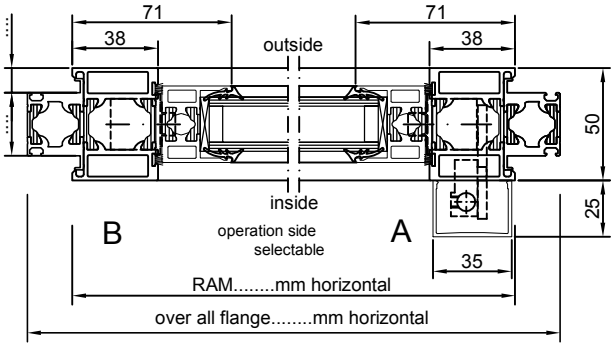

99510 Wiegendorf
Germany
Tel.: 036462/3388-0
Fax: 036462/3388-13

info@eurolam.de
www.eurolam.de

EuroLam

surface treatment:

scale: | position: | unit:

	date	name
drawn		
checked		
standard		

EuroLam-louvre window

TGL ISO 24 BT 50

Optionally with glass or panel infill

inquiry-/order-data sheet

page p.

list	change	date	name	file: 2016-12 - inquiry data sheet TGL50.dwg