



Special assembly “Access barrier - WPS”

1. Use

The WPS system includes a access barrier for automatic operable windows and louvres. The window and frame area is controlled by the WPS system to prevent danger during an automatic closing process. The WPS system stops or opens the windows.

2. Function

The WPS works without any physical contact: The sensor controls the direct clamping unit and the danger zone in the entire windowarea. That way the WPS can react provident. It can control the main closing edge, the secondary closing edge and multiple side by side laid windows all together. The WPS suits all window-types. There are no major constructional activities necessary, because only the sensor and the receiver have to be fixed. The WPS is trouble-free and retrofit irrespective of drive- and controlmanufacturer.

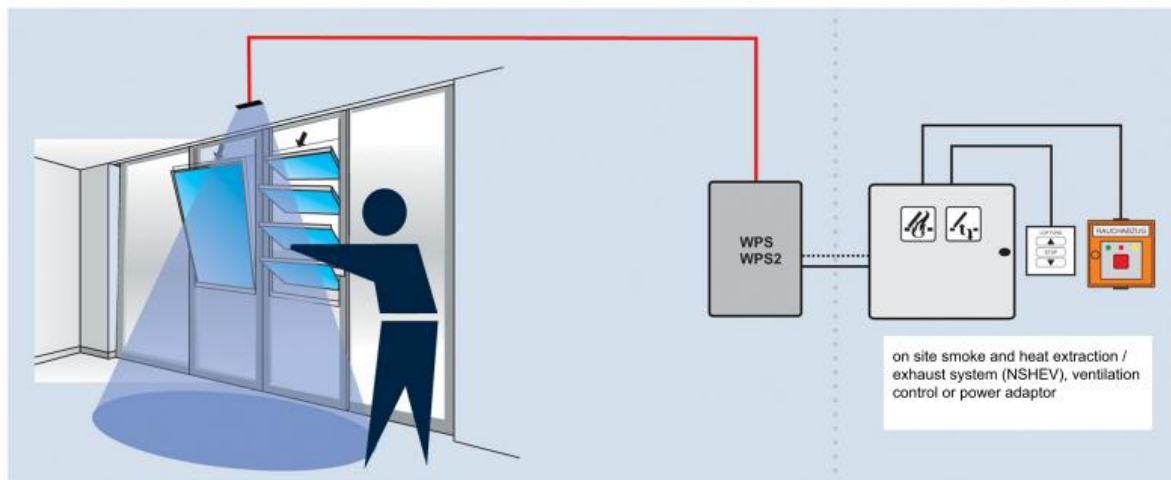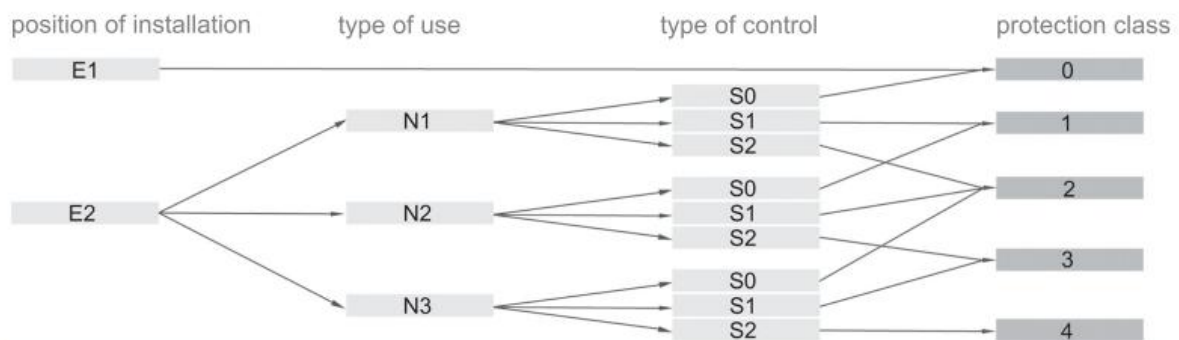

Size of controlled area depends on installation height of the sensor and type of sensor.

Safety classes

- 0 – No action
- 1 - Warning notices
- 2 - Signals
- 3 – e.g. tip operation
- 4 – e.g. light grid, like the WPS system



EuroLam GmbH
Kupferstraße 1
99510 Wiegendorf
GERMANY

Tel.: +49 36462 3388 - 0
Fax: +49 36462 3388 - 13
E-Mail: vertrieb@eurolam.de
Web: www.eurolam.de